

Xirrus Wireless Array

XR-1000 Series

Configurations: XR-1220 and XR-1230

DATASHEET


Introducing the Xirrus XR-1000 Series

The Xirrus XR-1000 Series Wireless Array is the first modular Wi-Fi product of its kind featuring upgradability, high scalability, high performance and integrated security to economically serve today's requirements without sacrificing for tomorrow's demand.

The Xirrus XR-1000 Wireless Array provides superior price/performance value by integrating two multi-state (2.4GHz and 5GHz) modular APs with high gain directional antennas, wireless controller, multi-gigabit switch, firewall, threat sensor and spectrum analyzer into a single modular chassis. The XR-1000 is designed to meet requirements for wireless coverage in high RF attenuation environments (dense walls), low user/device density coverage, and designs that include isolated locations where reliable wireless coverage is desired.

The Xirrus XR-1000 Series 4-slot chassis is the industry's only multi-state radio platform supporting multiple configurations with post-installation upgrade options. The Xirrus XR-1000 Series combines unmatched flexibility in wireless standards with the ability to scale a network to meet increasing demands without adding additional devices.

The XR-1000 utilizes the same multi-state modular APs available in all Xirrus XR Wireless Arrays, and is available in 300Mbps or 450Mbps 802.11n versions.

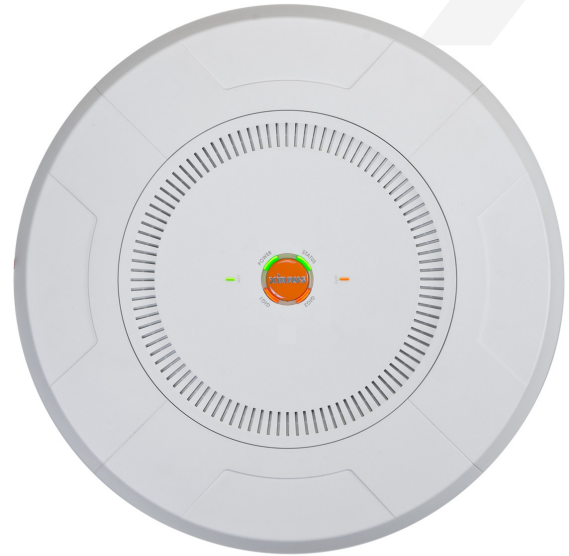

At A Glance

- 2 multi-state modular access points (2.4GHz and 5GHz)
- Supports 300Mbps or 450Mbps 802.11n versions
- Supports up to 480 users
- Field upgradable to new technologies (802.11ac, 802.11ad)

NSP Architecture for Amazing Performance


The architecture of the Xirrus XR-1000 Array is based upon a Network Services Processor (NSP) that delivers uncompromised performance to all associated users. The design allows for hardware based encryption, compression, acceleration, as well as reliable quality of service with uptimes and availability optimized for 802.11n performance and scalability.

Unmatched Upgradability

The Xirrus XR-1000 radio upgradable wireless platform allows a network to upgrade technologies without full replacement of the Array. Modular APs can be purchased in 300Mbps or 450Mbps versions, and every modular AP is capable of operating at 2.4GHz and 5GHz. The modular platform ensures support for new wireless technologies and is the first 802.11ac/11ad-ready product available.

XR-1000 SERIES 2-SLOT CHASSIS

Shown configured with four multi-state, pluggable radio modules

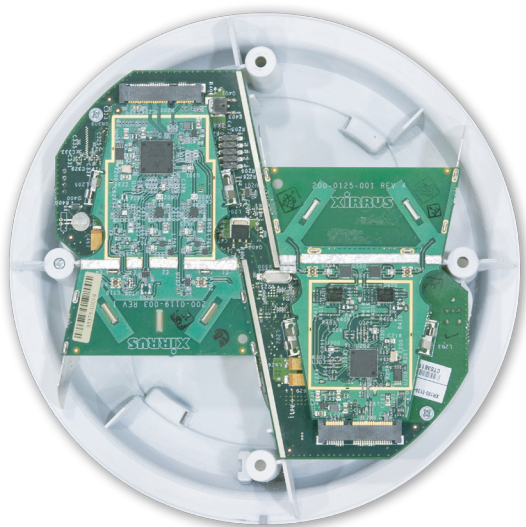

NEW FEATURES

Application Control – Firewall, apply QoS, and manage 900+ application types under 15 categories using Layer 7 Deep Packet Inspection and other contextual application detection techniques.

Bonjour Director – Extend Apple Bonjour protocols across Layer 3 boundaries for simple setup configuration of commonly used shared Apple services such as Airplay and Airprint.

Key Benefits

Flexible

The XR-1000 adds greater deployment flexibility for Xirrus XR-Series Wireless Array network designs. Engineers have greater flexibility in Array placement to maximize coverage and minimize equipment costs.

Scalable

Maintain a high level of performance for mission-critical applications and support the ability to handle unpredictable user growth throughout your wireless network. Scale capacity by increasing the network traffic throughput without installing additional devices.

Secure

Eliminate potential gaps in security infrastructure with the XR-1000 series virtualized firewall, threat sensor and spectrum analyzer providing comprehensive security without the need for additional equipment.

Economical

Multi-state design (2.4GHz and 5GHz on both modular APs) enables significant flexibility in adapting the wireless network to usage changes over time as compared to traditional APs which are fixed by band per radio. Modular AP slots enable upgrades to new radio technology over time without complete replacement of the product.

Configuration Specifications

	XR-1220	XR-1230
Chassis Size	7"	7"
AP Slots	2	2
Populated 802.11n Radios	2	2
Maximum Wi-Fi Bandwidth	600Mbps	900Mbps
Dedicated Wi-Fi Threat Sensor	Yes	Yes
Integrated Antennas	4	6
Maximum Wi-Fi Backhaul	450Mbps	450Mbps
Integrated Switch Ports	2	2
Gigabit Ethernet Uplink Ports	1	1
Maximum Associated Users	480	480
Radio Interface	2.5Gbps PCI-Express	2.5Gbps PCI-Express
Maximum Power Consumption	19W	22W
Maximum Power Consumption	33W	38W

Technical Specifications

FEATURE	SPECIFICATIONS
RF Management	<ul style="list-style-type: none"> In-band per IAP Spectrum Analysis Dynamic channel configuration Dynamic cell size configuration Monitor radio for threat assessment and mitigation Wired and wireless packet captures (including all 802.11 headers) Wired and Wireless Packet Captures Radio assurance for radio self test and healing RF monitor 2.4 & 5.0Ghz Honeypot Control – Increase available 2.4 & 5.0Ghz wireless device density through management of spurious 2.4 & 5.0Ghz association traffic. Ultra Low Power Mode – Maximize wireless channel re-use and increase wireless device density through tight power controls.
Wireless Protocols	IEEE 802.11a, 802.11b, 802.11d, 802.11e, 802.11g, 802.11h, 802.11i, 802.11j, 802.11n
Wired Protocols	<ul style="list-style-type: none"> IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, 1000BASE-T, 802.3ab 1000BASE-T IEEE 802.1q – VLAN tagging IEEE 802.1AX – Link aggregation IEEE 802.1d – Spanning tree IEEE 802.1p – Layer 2 traffic prioritization IPv6 Control – Increase wireless device density through control of unnecessary IPv6 traffic on IPv4-only networks.



Xirrus XR-1000 Series Wireless Array

FEATURE	SPECIFICATIONS	
Channel Support 2.4GHz (channels available based on country code selected)	1 2 3 4 5 6 7 8 9 10 11 12 13 14	
Channel Support 5GHz (channels available based on country code selected)	WPA IEEE 802.11i WPA2, RSN RFC 1321 MD5 Message-digest algorithm RFC 2246 TLS protocol version 1.0	RFC 3280 Internet X.509 PKI certificate and CRL profile RFC 4347 Datagram transport layer security RFC 4346 TLS protocol version 1.1
Management Interfaces	Command line interface Web interface (http / https) Xirrus Management System (XMS)	
Management	SNMP v1, v2c, v3 RFC 854 Telnet RFC 1155 Management Information for TCP/IP Based Internets RFC 1156 MIB RFC 1157 SNMP RFC 1212 Concise MIB Definitions RFC 1213 SNMP MIB II RFC 1215 A Convention for Defining Traps for use with the SNMP RFC 1350 TFTP RFC 1643 Ethernet MIB RFC 2030 Simple Network Time Protocol SNTP RFC 2578 Structure of Management Information Version 2 (SMIv2) RFC 2579 Textual Conventions for SMIv2 RFC 2616 HTTP 1.1 RFC 2665 Definitions of Managed Objects for the Ethernet Like Interface Types	RFC 2674 Definitions of Managed Objects for Bridges with Traffic Classes, Multicast Filtering and Virtual LAN Extensions RFC 2863 The Interface Group MIB RFC 3164 BSD Syslog Protocol RFC 3414 User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3) RFC 3416 Version 2 of the Protocol Operations for the Simple Network Management Protocol (SNMP) RFC 3417 Transport Mappings for the Simple Network Management Protocol (SNMP) RFC 3418 Management Information Base (MIB) for the Simple Network RFC 3584 Coexistence between Version 1, Version 2, and Version 3 of the Internet-standard Network Management Framework RFC 3636 Definitions of Managed Objects for IEEE Xirrus Private MIBs Integration with Splunk for accurate search and analysis of intra-organizational IT events Netflow Export v9 and IPFIX compatibility allows for IP traffic statistics collection
Carrier Applications	Passport Certification	
RFC Support	RFC 768 UDP RFC 791 IP RFC 2460 IPV6 (Bridging only) RFC 792 ICMP	RFC 793 TCP RFC 826 ARP RFC 1122 Requirements for internet hosts – communication layers RFC 1542 BOOTP
Security	WPA IEEE 802.11i WPA2, RSN RFC 1321 MD5 Message-digest algorithm RFC 2246 TLS protocol version 1.0	RFC 3280 Internet X.509 PKI certificate and CRL profile RFC 4347 Datagram transport layer security RFC 4346 TLS protocol version 1.1
Encryption Types	Open, WEP, TKIP-MIC: RC4 40, 104 and 128 bits SSL and TLS: RC4 128-bit and RDA 1024 and 2048 bit modular AP	
Authentication	IEEE 802.1x RFC 2548 Microsoft vendor-specific RADIUS attributes RFC 2716 PPP EAP-TLS RFC 2865 RADIUS Authentication RFC 2866 RADIUS Accounting RFC 2867 Tunnel Accounting RFC 2869 RADIUS Extensions RFC 3576 Dynamic Authorizations extensions to RADIUS RFC 3579 RADIUS Support for EAP RFC 3748 EAP-PEAP	RFC 5216 EAP-TLS RFC 5281 EAP-TTLS RFC 2284 EAP-GTC RFC 4186 EAP-SIM RFC 3748 Leap Pass through RFC 3748 Extensible Authentication Protocol Web Page Authentication <ul style="list-style-type: none"> • WPR, Landing Page, Redirect • Support for Internal WPR, Landing Page and Authentication • Support for External WPR, Landing Page and Authentication
Regulatory Compliance	CE Mark Safety: UL 60950-1:2003 EN 60950:2000 EMI and susceptibility (Class A)	U.S.:FCC Part 15.107 and 15.109 Canada: ICES-003 Europe: EN 55022, EN 55024 EN 60601-1-2 EN 301 893 V1.6.1
Physical Specifications	Dimensions (no connectors): 2.75 x 7.75 x 7.75 in. Weight: 1.3lb	Does not include mounting bracket
Environmental Specifications	Operating Temperature: 0 to +55C, 0-90% humidity, non-condensing	



Ordering Information

PART NUMBER	DESCRIPTION
Configured Models	
XR-1220	XR Wireless Array consisting of 2 slot chassis with integrated controller, 2 300Mbps 802.11n modular APs, and ArrayOS operating system
XR-1230	XR Wireless Array consisting of 2 slot chassis with integrated controller, 2 450Mbps 802.11n modular APs, and ArrayOS operating system
Software Licenses	
AOS-RXM-ALL	Bundle of RF Analysis Manager (RAM), RF Performance Manager (RPM), and RF Security Manager (RSM) ArrayOSfeature packages for 1 modular Access Point
AOS-APPCON	Application Control license enabling Deep Packet Inspection (DPI) for application visibility and control on 1 modular Access Point

Support & Maintenance

Xirrus is committed to the success of our customers and provides warranties and support options to best fit your needs. Xirrus XR Series Wireless Arrays ship from the factory with a 5-year hardware warranty. For further information on the Xirrus hardware warranties, software support and premium support offerings visit:

<http://www.xirrus.com/Support/Warranty-Support>

About Xirrus

To organizations who depend on wireless access to transform their business, Xirrus is the wireless network solution provider that provides the world's most powerful, scalable, and trusted solutions. Through product invention and system design, commitment to customer success, and the industry's best price performance, Xirrus gives you confidence that your wireless network performs under even the most demanding circumstances. Headquartered in Thousand Oaks, CA, Xirrus is a privately held company and designs and manufactures its family of products.



1.800.947.7871 Toll Free in the US
+1.805.262.1600 Sales
+1.805.262.1601 Fax
2101 Corporate Center Drive
Thousand Oaks, CA 91320, USA

To learn more visit:
xirrus.com or
email info@xirrus.com